


SPECIFICATION SHEET ASCENT

- Stylized to blend smoothly with the coach wall;
- Simplified installation, integrated deflector and mounting plate mounts directly to room and aligns with the top of the room flange;
- Improved pitch provides for rain run off;
- Hinged cover provides easy access for cleaning and service while providing a closed, finished appearance;
- Available in standard and XL versions.



SPECIFICATIONS

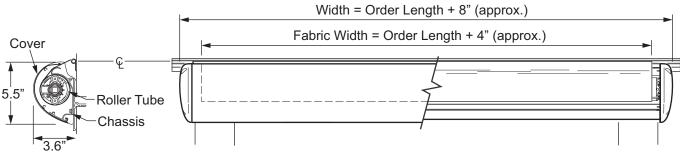

Dimensions are approximate, actual dimensions may vary based on the slideout configuration and if optional mounting brackets are used.

LENGTHS:	Standard 4	6" [107cm] - 196" [498cm]	EXTENSION: Up to 42"
box length)	XL 19	7" [500cm] - 384" [975cm]	
NSION	One spring for standard widths; Two springs for XL models		
Hardware:	White, Black		
Fabric:	Vinyl, Woven Acrylic (refer to sales literature for available colors)		
Standard	Base Weight @	42" Box Length = 20 lbs;	for every 12" increase, add 3.25. lbs
XL	Base Weight @	197" Box Length = 71 lbs;	for every 12" increase, add 3.25 lbs
	box length) NSION Hardware: Fabric: Standard	box length) XL 19 NSION One spring for Hardware: White, Black Fabric: Vinyl, Woven Ac Standard Base Weight @	box length) XL 197" [500cm] - 384" [975cm] NSION One spring for standard widths; Two spring Hardware: White, Black Fabric: Vinyl, Woven Acrylic (refer to sales literature for Standard Base Weight @ 42" Box Length = 20 lbs;


Base weight calculation is approximate and does not include awning rail.

Actual weight may vary based on type of canopy fabric and specific installation details

MOUNTING METHODS

DIRECT MOUNT

The direct mount method is for non-recessed rooms with flat flanges.




as036a


- Is the outside face of the flange ☐ YES ☐ NO flat?
- 2. Does the flange overlap the ☐ YES ☐ NO vehicle wall? (Flange is not flush or recessed).
- 3. Is the height of the flange from □ YES □ NO the top of the room 2.7" or less?

If the answer to all questions is yes, the Ascent may be mounted directly to the room. Use the bracket mount if any answer is no.

BRACKET MOUNT

The bracket mount method is for taller flanges or flanges that are curved or contoured or it is necessary to raise the chassis to clear awnings mounted on the slideout.





as036b

- 1. Is the height of the flange from the ☐ YES ☐ NO top of the room to the top of the flange 2.7" 4.5"?
- 2. Is the maximum flange thickness .9" ☐ YES ☐ NO or less
- 3. Can the bottom of the bracket be positioned to meet the minimum/maximum dimensions. □ YES □ NO

If the answer to all questions is yes, the Ascent may be mounted with brackets.

WARRANTY

The Ascent slideout cover is covered by the standard Carefree of Colorado 1 year Limited Warranty.

ON-LINE AT WWW.CAREFREEOFCOLORADO.COM

- ♦ Product Manuals
- ♦ Fabric Options
- ♦ Warranty Information