




PRODUCT DATA SHEET

ECLIPSE

The unique "scissor" style arms eliminate the need for vertical ground supports.
 Worm gear style motor is billow proof - eliminates the need for travel locks.
 Easy to use 6 position pitch adjustment. Pitch can be set with the awning open or closed.
 Can be installed using a single switch control or with the Direct Response™ electronic system.
 LED Options: Available in white or RGB (color). LED's can be mounted in the roller tube or at the awning rail.



SPECIFICATIONS

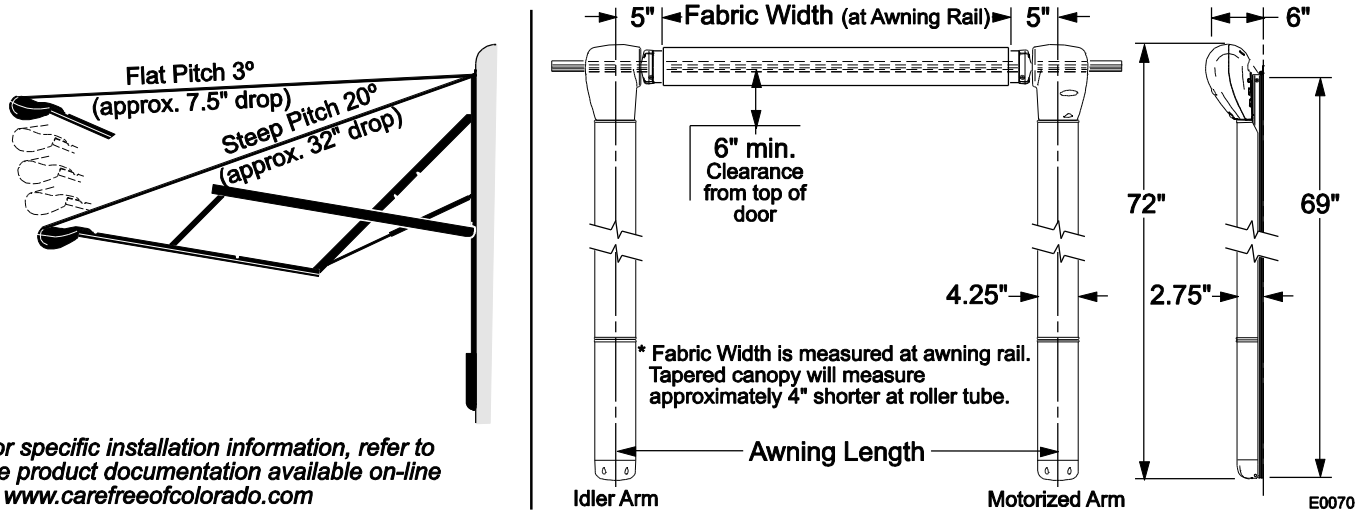

LENGTH:	8 - 21 feet	EXTENSION:	90 inches	PITCH:	Adjustable - 6 position
MOTOR:	Power: 10VDC–14VDC	Circuit Rating:	15 amp	motor mounted in arm	
POWER SOURCE:	Vehicle's 12V system				
EXTEND ACTUATION:	Gas Shock				
POSITION CONTROL:	Motorized roll out/in				
CONTROLLER:	Standard: 3 position, momentary ON, center OFF Switch Optional: Direct Response Electronic System				
COLOR:	Frame:	White or Black			
	Fabric:	Heavy Duty Vinyl or Acrylic Fabric (refer to sales literature for colors)			
	Fabric Wrap:	Weatherguard (vinyl only), FLXguard, Alumaguard or Uniguard			
LED:	Power:	1A, 12VDC			
	Control	White:	Single pole, single throw switch (SR0101)		
		RGB	IR (Infrared) Controller with sensor and remote.		

WARRANTY

The Eclipse Patio Awning is covered by the standard Carefree of Colorado 1 year Limited Warranty.