





# PRODUCT DATA SHEET

## LATITUDE

### Wall Mounted Lateral Arm Awning

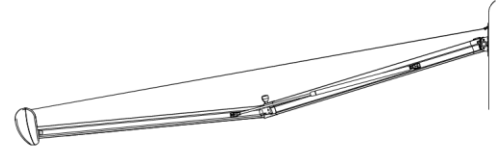


Single Pitch

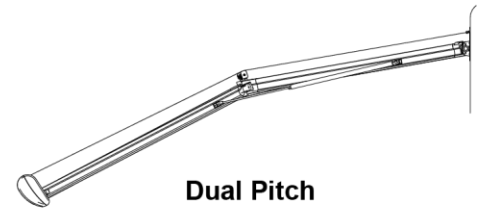

Dual Pitch

FL045

- Single touch operation for extend and retract;
- Available in two configurations: single stage or dual stage;
- The awning motor operates on standard 12VDC (range 10VDC to 14VDC);
- Direct Response is standard;
- LED lighting is standard, mounted in roller tube.
- Simple Installation:
  - No pre-installation assembly;
  - Arms mount directly to vehicle wall\*\*;
  - Canopy connects to awning rail using Carefree's patent pending QuicConnect.

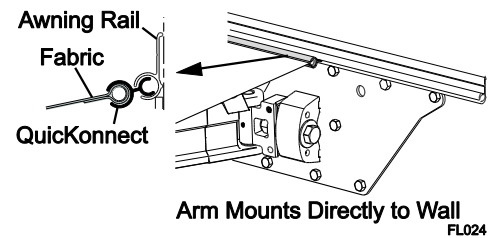

\*\*Arms must mount to structural supports in wall. Refer to installation manual for more detail.

<b>AVAILABLE LENGTHS:</b>	10'4"	11'	12'	13'	14'	15'	16'	18'	20'
<b>SUPPORT:</b>	Lateral Spring Arms				Pitch Adjust Range: 7°				
<b>MOTOR:</b>	Power: 10VDC–14VDC				Circuit Rating: 15 amp				
<i>(motor is mounted in RH roller tube head)</i>									
<b>POWER SOURCE:</b>	Motor and controls are routed and hardwired into the vehicle's 12V system								
<b>CONTROLS:</b>	Carefree BT12 Wireless Awning Control System								
<b>COLOR:</b>	<i>Hardware:</i>	White or Black							
	<i>Fabric:</i>	Heavy Duty Vinyl with vinyl weatherguard or FLXguard <i>(refer to sales literature for colors)</i>							

### WARRANTY

The Latitude awning is covered by the standard Carefree of Colorado 1 year Limited Warranty.