



# AWNING STABILIZER POLE KIT

## RV Accessories

FOR CAREFREE'S LATITUDE AND VERTICAL ARM AWNING, THE STABILIZER POLE KIT ALLOWS YOU TO TIE DOWN THE AWNING DURING PROLONGED USE.

1. Open the awning and set the desired pitch according to the product documentation.

**NOTICE** Set the awning power switch to off to prevent the awning from retracting when the supports are installed. Retracting the awning with the supports and tie-downs attached can damage the awning.


2. Place the support pole cradle under the roller tube between the canopy and endcap.
3. Open the height adjustment lever on the vertical support and adjust the height of the support as desired.

**NOTICE** Do not use the supports to adjust the awning's pitch. Use the awning's pitch adjustments prior to installing the supports.

The poles may be adjusted from 55" to 108".

4. Place a stake through the d-ring of the tension strap. Then drive the stake into the ground approximately 5'-6' in front of the awning.
5. Loop the strap over the roller tube. Attach the d-ring to the hook on the cradle.
6. Tighten the strap by pulling the open end of the strap through the tension adjustment rings.
7. **To loosen the straps**, Open the height adjustment lever. Gently pull the roller tube down to release the d-ring from the hook on the cradle.
8. Repeat for the other side.

**NOTICE** If it is necessary to adjust the awning pitch after staking, loosen the tension straps and lower the height of the vertical support before adjusting the pitch. Failure to do so can cause damage to the awning.

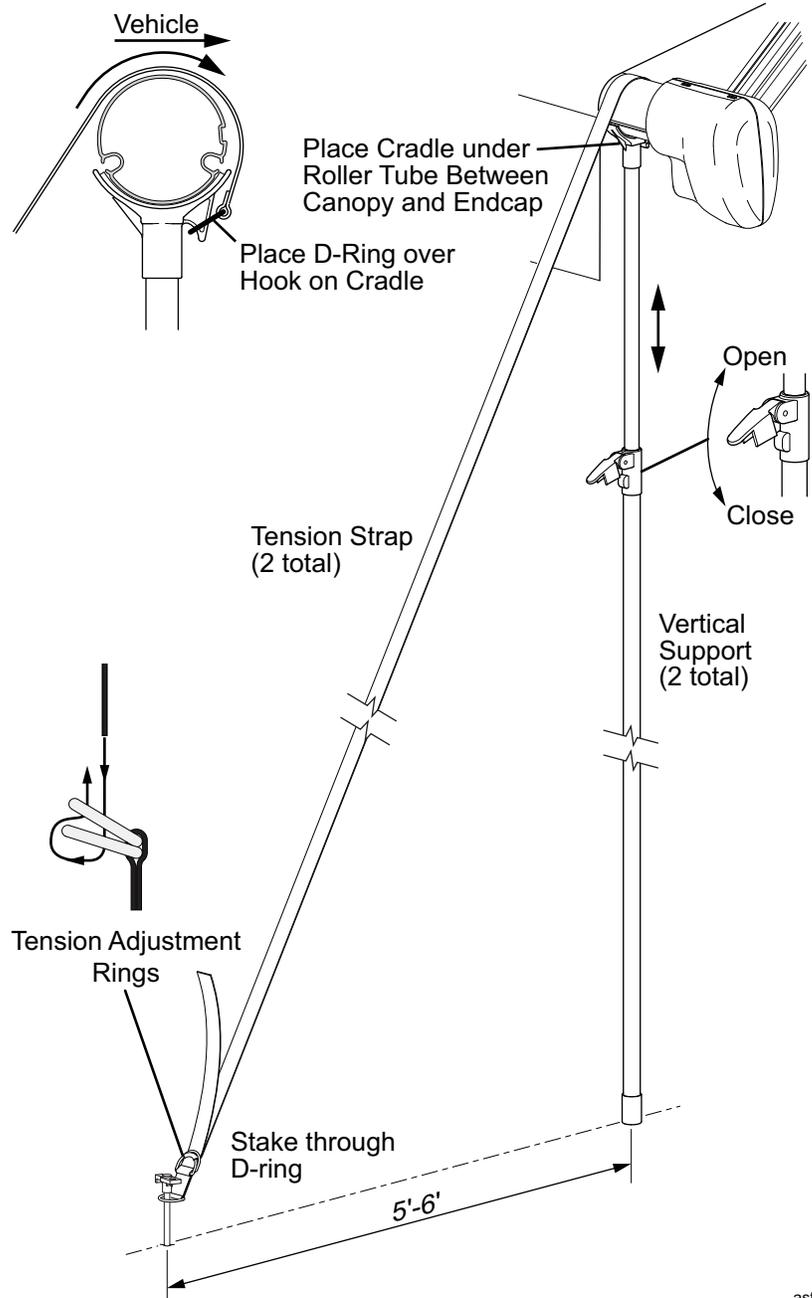

ast001

**NOTICE** Always remove the supports before retracting the awning. Retracting the awning with the supports and tie-downs attached can damage the awning.